


Liquid Cooling ES All-in-one Cabinet

ES232/115K-A/EU



Advantages and Features

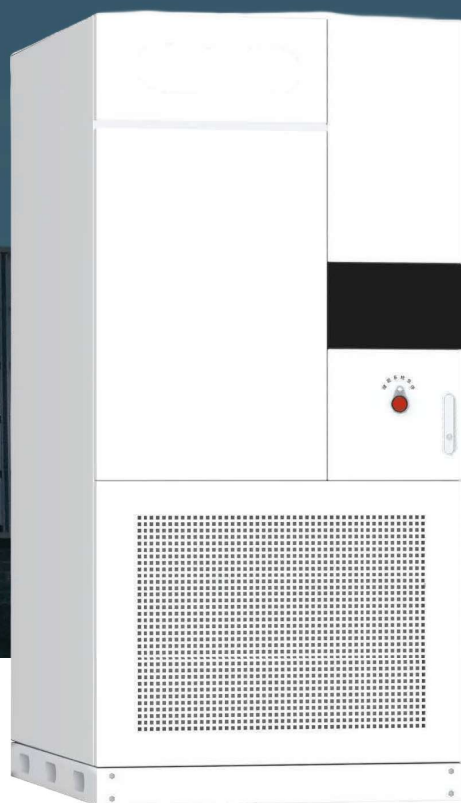

Three-level topology, conversion efficiency up to 99.0%



Liquid-cooling temperature control design, battery pack temperature difference $<3^{\circ}\text{C}$, auxiliary power consumption reduced by 30%, extending system lifespan by 2 years+



CATL long-life LFP battery cells, cycle life > 8000 times



Modular expansion, supports up to 20 units in parallel



Support off-grid operation, providing backup power for critical loads

 **Bessteq**
A PART OF TECHON7 GROUP

Bessteq - Lars Nordberg-Hansen
LNH@techon7.dk / +45 2230 5000

Specifications

Product Model	ES232/115K-A/EU
DC Side	
Cell Type	LFP/280Ah
Rated Energy	232.96kWh
Rated Battery Voltage	832Vdc
Operating Voltage Range	655Vdc~949Vdc
Max. DC Current	177A
Battery Configuration	1P260S
Number of Battery Packs	5
Charge/Discharge C-Rate	≤0.5P
On-grid Side	
Rated Output Power	115kW
Rated Output Voltage	400Vac
Rated Output Current	167A
Rated Output Voltage Range	-20%~15%
Rated Grid Frequency	50Hz/60Hz (±5Hz)
Output Power Factor	-1~+1
Grid Connection Method	3L+N+PE
Adaptation to Grid Types	TT/TN
Topology	Transformerless
Efficiency	
Max. Efficiency	90%
General Data	
Surge Protection	DC Type II / AC Type II
Pollution Level	Class II
Corrosion Protection Rating	C3, C5 (Optional)
Fire Control	Aerosol
Ingress Protection	IP55
Installation Method	Outdoor installation
Battery Cooling Concept	Liquid cooling
Running Temperature	-30°C~+60°C (Derating above 50°C)
Operating Surroundings Humidity	0~95% (No condensation)
Permissible Altitude	0-4000m (Derating above 2000m)
Cabinet Size (LxWxH)	1120*1400*2403mm
Weight	≤2490kg
Display	LED+Web+APP
Interface	CAN, RS485, Ethernet, 4G
Safety EMC / Standard	EN 62477-1, EN 61000-6-2, EN 61000-6-4
Grid Connection Standard	EN 50549-1:2019+A1 2023, TOR Erzeuger: 2019-12-12, OVE-Richtlinie R 25:2020-03-01, PPDS.VDE4105

Disclaimer:

This document may contain forecast information, including but not limited to future finances, operations, product series, new technologies, etc. Due to practice the uncertainty in the actual results may differ from the predicted information. Therefore, the information in this document is for reference only and does not constitute any offer or promise. Techon7Group may modify the above information without notice.



Bessteq - Lars Nordberg-Hansen
LNH@techon7.dk / +45 2230 5000